



Solving your relay requirements since 1922

Amperite Co.

(800) 752-2329  
www.Amperite.com

## ST1 Series Solid State Delay-On-Make Timers



- ... 100% solid state circuitry - no moving parts
- ... Two terminal series connection to load
- ... Fixed or field adjustable delays from milliseconds to hours
- ... Up to 1 ampere continuous load current
- ... CMOS digital circuitry
- ... UL File #E96739(M)
- ... CSA File #LR62586

### Timing Mode:

Delay on operate begins upon application of input power. The load is energized at the end of the delay period and remains so until input power is removed.

### Timing Diagram:



### Contact Information:

Solid state switching device 1 form A, normally open series connection. Continuous current rating 1 ampere. Maximum inrush 10 amperes. Minimum load current 5 milliamperes. Voltage drop typically 2.5 volts RMS @ 1 ampere.

### Environmental Information:

Temperature Range: -40° C to +65° C (-40° F to +149° F)

### Timing Specifications:

Timing: Factory fixed, or .1 seconds to 100 hours in any one of eight ranges. Timing is set by user supplied resistor or potentiometer.

#### \*Timing ranges:

- .1 to 10 seconds
- .2 to 20 seconds
- 1 to 100 seconds
- 10 to 1000 seconds



Solving your relay requirements since 1922

Amperite Co.

(800) 752-2329  
www.Amperite.com

- .1 to 10 minutes
- 1 to 100 minutes
- 10 to 1000 minutes
- .1 to 10 hours
- 1 to 100 hours


\*See External Resistor Selection Graph for specific resistor value.

Timing tolerance: fixed units = +/- 10%

Timing repeatability: +/- 2%

Timing cycle interrupt transfer: none

**Outline Dimensions:**

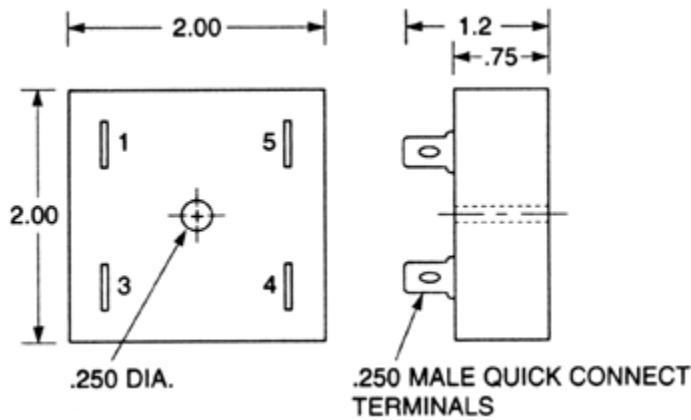

**AC (60 Hz) and DC INPUT VOLTAGES & LIMITS:**

Nominal	Minimum	Maximum
12V	10V	14V
24V	20V	28V
48V	41V	55V
110V	95V	125V
120V	105V	130V
230V	190V	255V




Solving your relay requirements since 1922

Amperite Co.


(800) 752-2329  
www.Amperite.com

### External Resistor Selection:

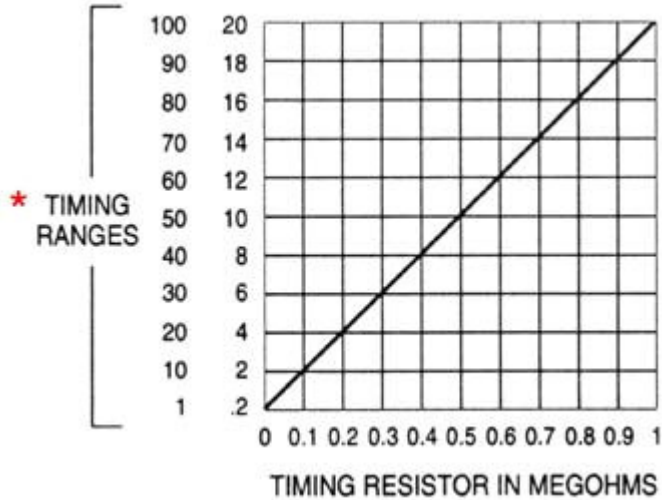

\* Note: use appropriate timing scale in accordance with Timing ranges specified above.

### Wiring Diagrams:

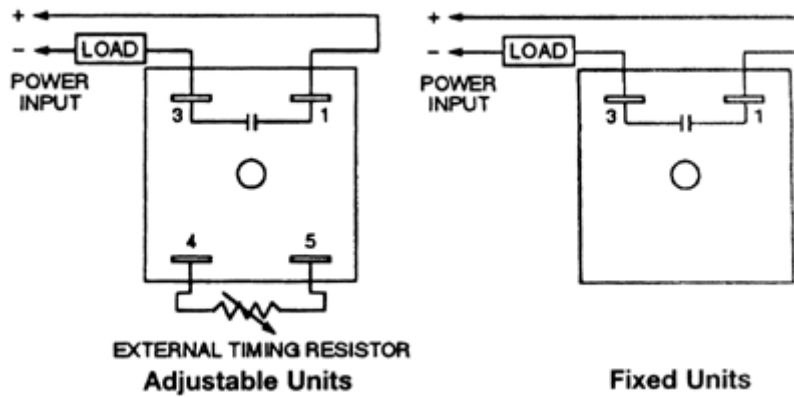

### Mechanical Information:


Enclosure 2 x 2 x 3/4 inch black plastic, epoxy sealed. Center hole mounting. Two or four 1/4 inch quick connect male terminals.



### Ordering Information:

Ordering Information: Definition of a part number for the Amperite ST1 Series Time Delay Relay:

Example:

	<p>Amperite Co.</p> <p>(800) 752-2329 www.Amperite.com</p>
---	--

120 A 1 - 100 S ST1  
 ↑    ↑    ↑    ↑    ↑    ↑  
 A    B    C    D    E    F

**A:** Denotes nominal input voltage. Voltages available: 12, 24, 48, 120, and 230 volts AC; 12, 24, 36, 48, and 110 volts DC. For other voltages consult factory.

**B:** Denotes type of input power required for operation

A = AC - Alternate Current

D = DC - Direct Current

**C&D:** Denotes range of adjustability using an external resistor or potentiometer, where C is the minimum timing and D is the maximum timing. Standard timing span is 100:1. For fixed timing units specify a single number.

**E:** Denotes unit of time delay: S = seconds; M = minutes; H = hours.

**F:** Denotes Amperite ST1 Series solid state, normally open time delay.

 *Solving Your Relay Requirements Since 1922*